

How to Upgrade FlashPac Firmware under Windows

Step 1: If you are running Win98 please, install the FlashPac driver first


Win 2K SP1, SP2. Please upgrade to **Win 2K SP3, SP4.**

Step 2: Reboot as requested to complete the installation procedure

Step 3: Insert device into USB port

Step 4: Double click "[PS0Av43m.exe](#)" to run the Firmware upgrade program.

You should see the following screen.

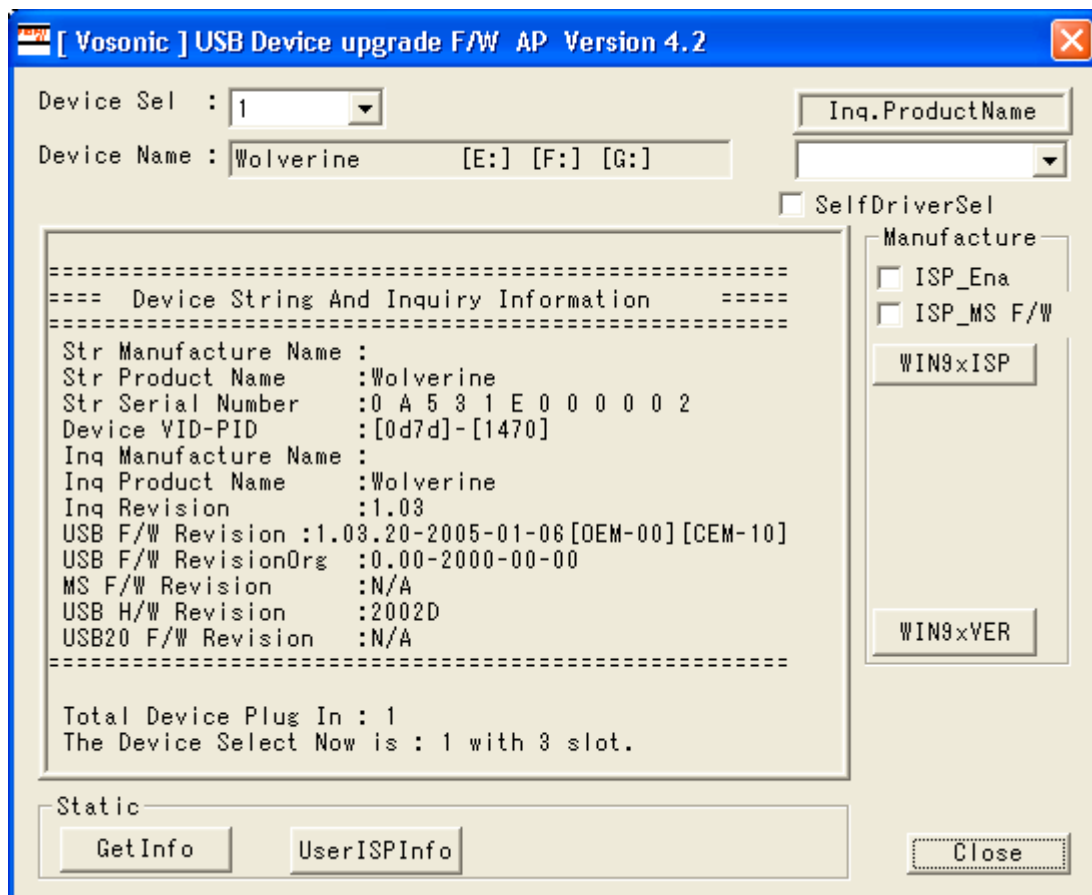

Step 5: Tick the Box “ISP_Ena”

The screenshot shows the 'Yosonic USB Device upgrade F/W AP Version 3.08' window. The 'Device Sel' dropdown is set to '1', and the 'Device Name' is 'VP2160'. The 'Inq.ProductName' dropdown is empty. The 'SelfDriverSel' checkbox is unchecked. The 'Manufacture' section has two checkboxes: 'ISP_Ena' (checked) and 'ISP_MS F/W' (unchecked). The 'WIN9xISP' and 'WIN9xVER' buttons are visible. The 'Static' section has 'GetInfo' and 'UserISPInfo' buttons. The 'Close' button is at the bottom right.

Device Sel : 1

Device Name : VP2160 [F:] [G:] [H:] [J:]

Inq.ProductName

SelfDriverSel

Manufacture

☒ ISP_Ena

☐ ISP_MS F/W

WIN9xISP

WIN9xVER

Static


GetInfo UserISPInfo

Close

=====
Device String And Inquiry Information
=====

Str Manufacture Name :
Str Product Name :VP2160
Str Serial Number :0 A 4 B 0 A 0 0 0 0 2
Device VID-PID :[0d7d]-[1470]
Inq Manufacture Name :
Inq Product Name :VP2160
Inq Revision :1.00
USB F/W Revision :1.00.20-2004-11-02 [OEM-00] [CEM-10]
USB F/W RevisionOrg :0.00-2000-00-00
MS F/W Revision :N/A
USB H/W Revision :2002D
USB20 F/W Revision :N/A
=====

Total Device Plug In : 1
The Device Select Now is : 1 with 4 slot.

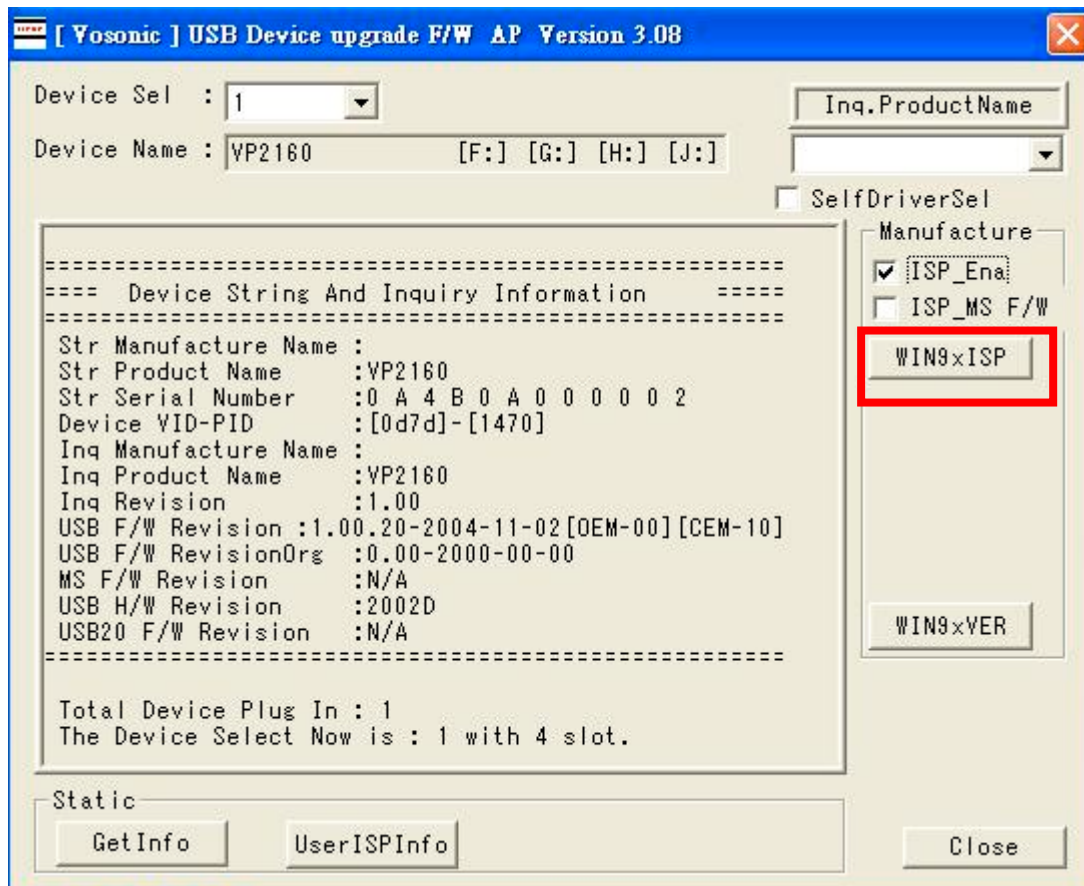

Step 6: Press “WIN9xISP” to begin Firmware upgrade.
When finish, a message will display.

Step 7: Press the Reset hole on the side of the FlashPac with a paper clip.

Step 8: Windows will re-install drivers and new firmware version will show on the FlashPac’s screen.